

**2.0A SBR<sup>®</sup>**  
**Surface Mount Super Barrier Rectifier**  
**PowerDI<sup>™</sup>123**

NEW PRODUCT

**Features**

- Low Forward Voltage Drop
- Low Leakage Current
- Superior Reverse Avalanche Capability
- Excellent High Temperature Stability
- Patented Interlocking Clip Design for High Surge Current Capacity
- Patented Super Barrier Rectifier Technology
- Soft, Fast Switching Capability
- 150°C Operating Junction Temperature
- ±16KV ESD Protection (HBM, 3B)
- ±25KV ESD Protection (IEC61000-4-2 Level 4, Air Discharge)
- **Lead Free Finish, RoHS Compliant (Note 1)**
- **“Green” Molding Compound (No Br, Sb)**
- **Qualified to AEC-Q 101 Standards for High Reliability**

**Mechanical Data**

- Case: PowerDI<sup>™</sup>123
- Case Material: Molded Plastic, “Green” Molding compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Polarity Indicator: Cathode Band
- Terminals: Finish - Matte Tin annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208 **(e3)**
- Marking Information: See Page 4
- Ordering Information: See Page 4

**Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified**

Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	30	V
Working Peak Reverse Voltage	V <sub>RWM</sub>		
DC Blocking Voltage	V <sub>RM</sub>		
RMS Reverse Voltage	V <sub>R(RMS)</sub>	21	V
Average Rectified Output Current (See Figure 1)	I <sub>O</sub>	2.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I <sub>FSM</sub>	75	A
Maximum Thermal Resistance	R <sub>θJS</sub>	5	°C/W
Thermal Resistance Junction to Soldering (Note 2)	R <sub>θJA</sub>	175	
Thermal Resistance Junction to Ambient (Note 3)	R <sub>θJA</sub>	100	
Thermal Resistance Junction to Ambient (Note 4)	R <sub>θJA</sub>	100	
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	°C

Notes: 1. RoHS revision 13.2.2003. High temperature solder exemption applied, see *EU Directive Annex Note 7*.  
 2. Theoretical R<sub>θJS</sub> calculated from the top center of the die straight down to the PCB cathode tab solder junction.  
 3. FR-4 PCB, 2 oz. Copper, minimum recommended pad layout per <http://www.diodes.com/datasheets/ap02001.pdf>.  
 4. Polyimide PCB, 2 oz. Copper, minimum recommended pad layout per <http://www.diodes.com/datasheets/ap02001.pdf>.

## Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 5)	$V_{(BR)R}$	30	-	-	V	$I_R = 250\ \mu\text{A}$
Forward Voltage Drop	$V_F$	-	0.23 0.34 0.40 0.50 0.13 0.275	0.28 0.39 0.45 - 0.19 0.33	V	$I_F = 0.1\text{A}, T_J = 25^\circ\text{C}$ $I_F = 1.0\text{A}, T_J = 25^\circ\text{C}$ $I_F = 2.0\text{A}, T_J = 25^\circ\text{C}$ $I_F = 4.0\text{A}, T_J = 125^\circ\text{C}$ $I_F = 0.1\text{A}, T_J = 125^\circ\text{C}$ $I_F = 1.0\text{A}, T_J = 125^\circ\text{C}$
Leakage Current (Note 5)	$I_R$	-	50 55 5 7	100 200 10 15	$\mu\text{A}$ $\mu\text{A}$ mA mA	$V_R = 5\text{V}, T_J = 25^\circ\text{C}$ $V_R = 30\text{V}, T_J = 25^\circ\text{C}$ $V_R = 5\text{V}, T_J = 125^\circ\text{C}$ $V_R = 30\text{V}, T_J = 125^\circ\text{C}$

Notes: 5. Short duration pulse test used to minimize self-heating effect.

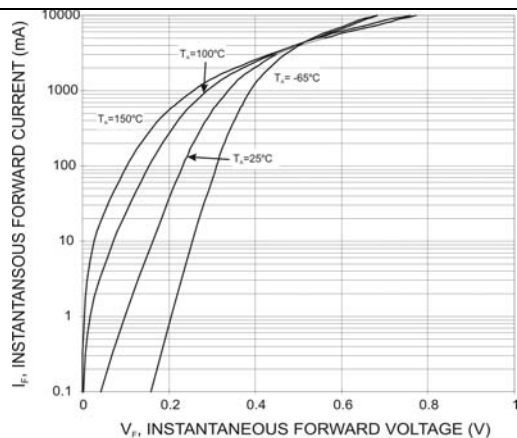


Fig.1 Typical Forward Characteristics

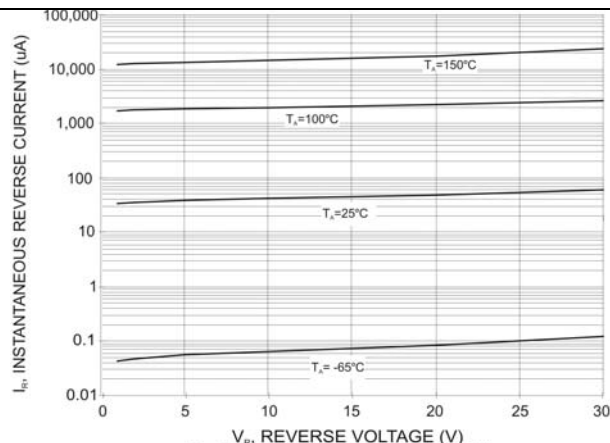


Fig.2 Typical Reverse Characteristics

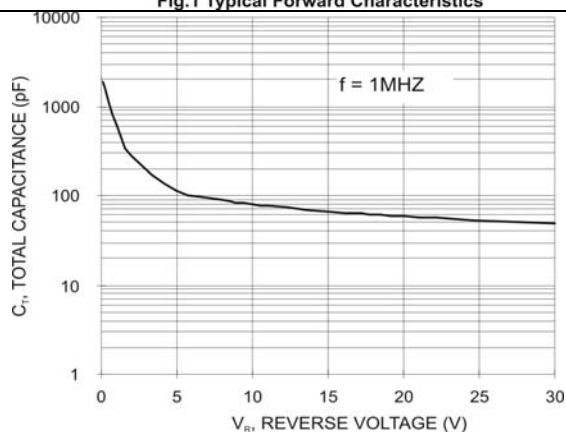


Fig.3: Typical Total Capacitance




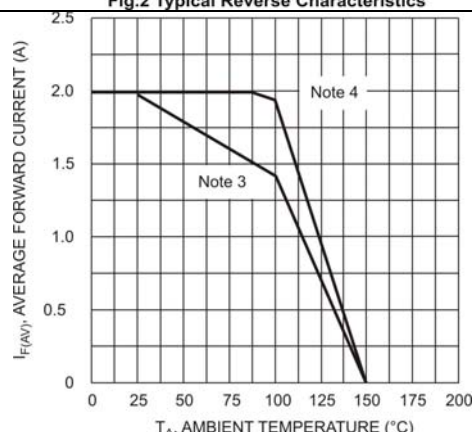


Fig.4 Forward Current Derating Curve

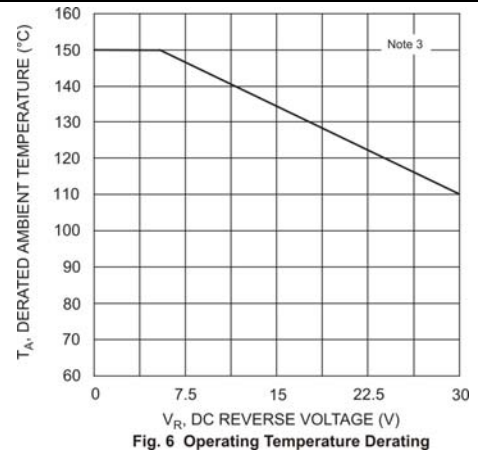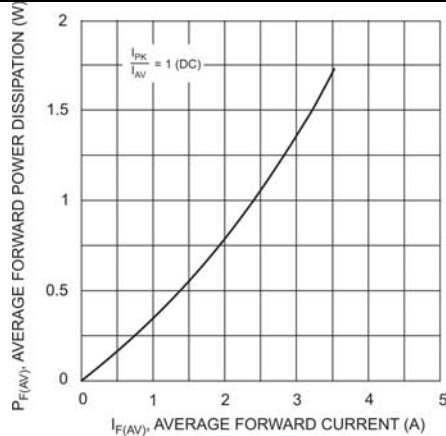

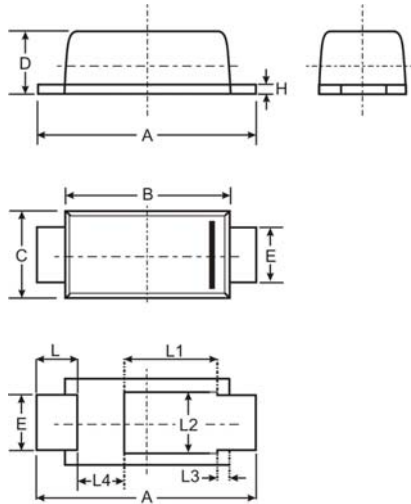


## Package Outline Drawings

### PowerDI™123



PowerDI™123			
Dim	Min	Max	Typ
A	3.65	3.75	3.70
B	2.775	2.825	2.80
C	1.750	1.800	1.775
D	0.955	1.000	0.98
E	0.95	1.05	1.00
H	0.15	0.25	0.20
L	0.60	0.70	0.65
L1	—	—	1.36
L2	—	—	1.10
L3	—	—	0.20
L4	0.95	1.25	1.05
All Dimensions in mm			

## Marking, Polarity, Weight & Ordering Information

SBR2A30P1	Case Style		Marking	Weight
	 Top View	 Back View		0.096g (approx.)

Ordering Information	Date Code
SBR2A30P1-7 3000/Tape & Reel	2A3 = Product Type Marking Code YM = Date Code Marking Y = Year (ex: T = 2006) M = Month (ex: 9 = September)

### Date Code Key

Year	2006	2007	2008	2009	2010	2011	2012
Code	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.